


# CRYSTAL OSCILLATORS

Automotive Grade

ACTUAL SIZE:

## SMAF-531 SERIES CERAMIC PACKAGE For 32.768KHz

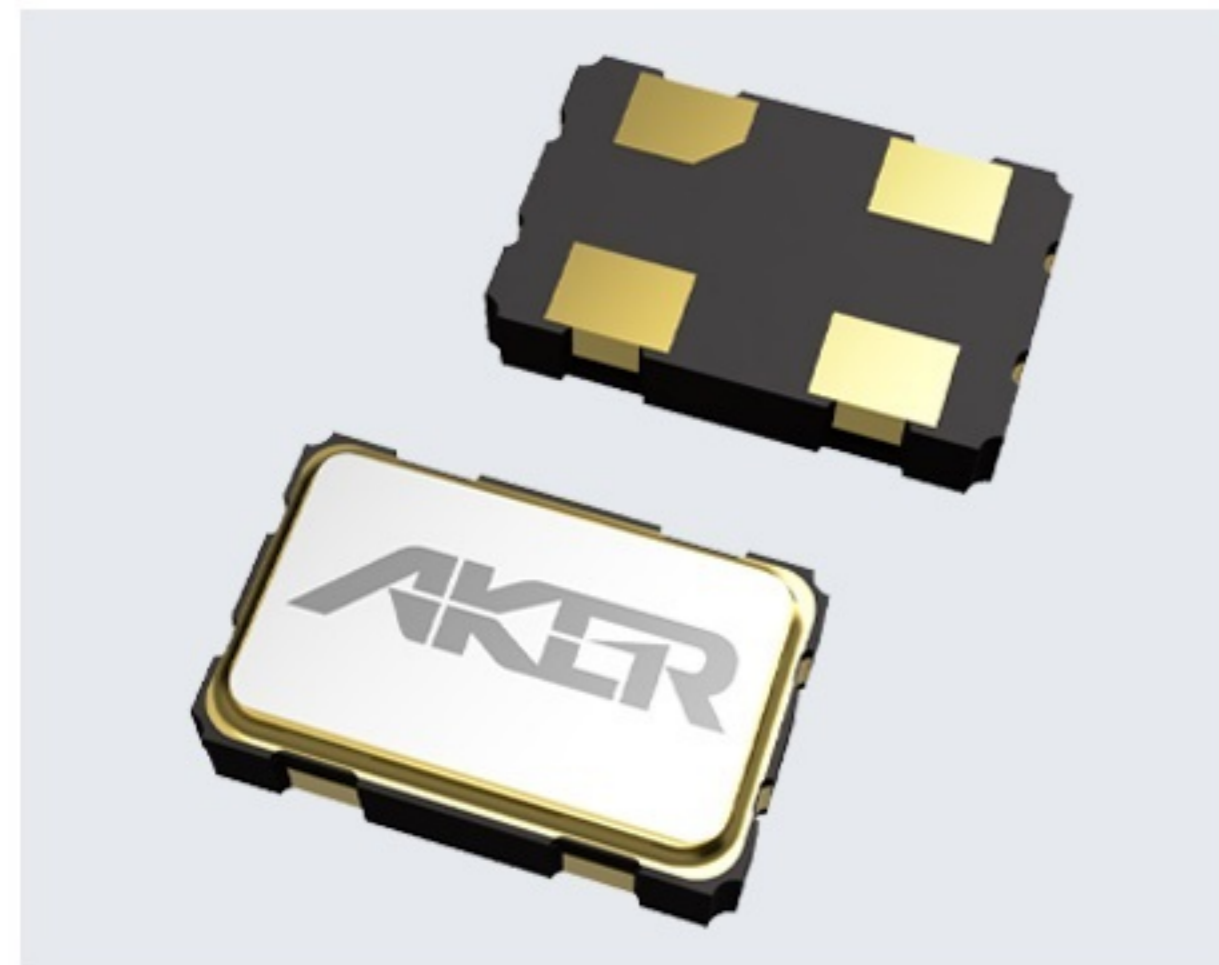

### APPLICATIONS

- ▶ Industry Control
- ▶ IPC
- ▶ Server
- ▶ Media

### FEATURES

- ▶ Seam Seal
- ▶ Excellent Solderability
- ▶ Tri-State
- ▶ Low Power Consumption
- ▶ RoHS Compliant
- ▶ IATF-16949 Certified
- ▶ AEC-Q200 Qualified

## Specification

### MODEL

FREQUENCY RANGE	Hz	32.768K			
FREQUENCY STABILITY*	ppm	± 25 ~ ± 100			
OPERATING TEMPERATURE	°C	- 40 ~ + 85 Or - 40 ~ + 125			
STORAGE TEMPERATURE	°C	- 55 ~ + 125			
POWER SUPPLY VOLTAGE	VDC	+1.8 ± 10%	+2.5 ± 10%	+3.3 ± 10%	+1.62 ~ +3.63
OUTPUT LEVEL		CMOS			
OUTPUT SYMMETRY	%	45 ~ 55 (at 50% VDC)			
INPUT CURRENT	uA(Max.)	200			
RISE/FALL TIME	ns(Max.)	50			
OUTPUT LOAD		15 pF Max.			
AGING	ppm/Year	± 3			

\*Inclusive of 25°C ± 3°C & Operating Temperature Range.

\*\*Specification subject to change without notice.

## Pin Connection

PIN No.	Connection
#1	Enable/Disable
#2	GND
#3	Output
#4	VDC

## Enable/Disable Function

Pin #1	Pin #3
HIGH(OPEN)	Output
LOW	High Impedance

## Dimension(mm)

### SMAF-531 SERIES

