


CRYSTAL OSCILLATORS

Automotive Grade

ACTUAL SIZE:

SMBF-751 SERIES CERAMIC PACKAGE For 32.768KHz

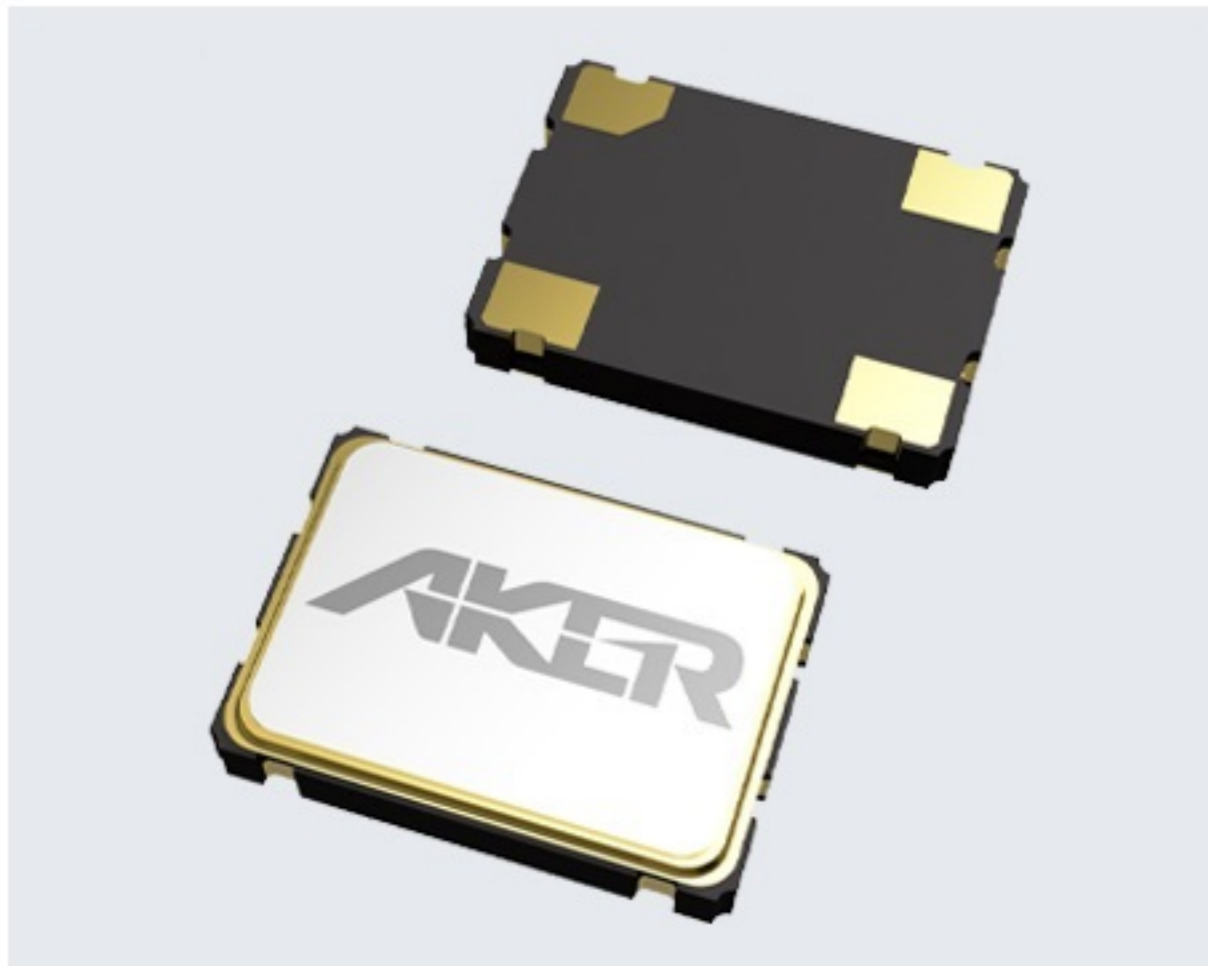

APPLICATIONS

- ▶ Industry Control
- ▶ IPC
- ▶ Home Appliance
- ▶ Server

FEATURES

- ▶ Seam Seal
- ▶ Excellent Solderability
- ▶ Tri-State
- ▶ Low Power Consumption
- ▶ RoHS Compliant
- ▶ IATF-16949 Certified
- ▶ AEC-Q200 Qualified

Specification

MODEL

FREQUENCY RANGE	Hz	32.768K			
FREQUENCY STABILITY*	ppm	± 25 ~ ± 100			
OPERATING TEMPERATURE	°C	- 40 ~ + 85 Or - 40 ~ + 125			
STORAGE TEMPERATURE	°C	- 55 ~ + 125			
POWER SUPPLY VOLTAGE	VDC	+1.8 ± 10%	+2.5 ± 10%	+3.3 ± 10%	+1.62 ~ +3.63
OUTPUT LEVEL		CMOS			
OUTPUT SYMMETRY	%	45 ~ 55 (at 50% VDC)			
INPUT CURRENT	uA(Max.)	200			
RISE/FALL TIME	ns(Max.)	50			
OUTPUT LOAD		15 pF Max.			
AGING	ppm/Year	± 3			

*Inclusive of 25°C ± 3°C & Operating Temperature Range.

**Specification subject to change without notice.

Pin Connection

PIN No.	Connection
#1	Enable/Disable
#2	GND
#3	Output
#4	VDC

Enable/Disable Function

Pin #1	Pin #3
HIGH(OPEN)	Output
LOW	High Impedance

Dimension(mm)

SMBF-751 SERIES

