


Crystals | XO's | TCXOs

for AI & Edge Computing

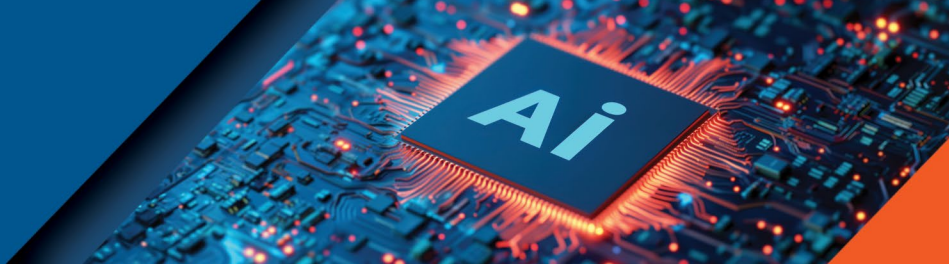

Edge AI/Edge Computing • AI Computing Platforms • AI Servers • Machine Vision Systems • Sensor Processing Systems • AI Robotics

Product	Aker Series	Package Size	Frequency	Tolerance	Voltage	Operating Temp
Tuning Fork	D31N	3.2 x 1.5 x 0.9 mm	32.768 KHz	± 10 ~ ± 20	–	-40~+85°C -40~+125°C
Tuning Fork	D21N	2.0 x 1.2 x 0.6 mm	32.768 KHz	± 10 ~ ± 20	–	-40~+85°C
Tuning Fork	D11N	1.6 x 1.0 x 0.5 mm	32.768 KHz	± 10 ~ ± 20	–	-40~+85°C
Crystal	CXAN-321	3.2 x 2.5 x 0.75 mm	8.000~156.250 MHz	± 10 ~ ± 30	–	-40~+85°C -40~+125°C
Crystal	CXAN-221	2.5 x 2.0 x 0.65 mm	12.000~133.000 MHz	± 10 ~ ± 30	–	-40~+85°C -40~+125°C
Crystal	CXAN-211	2.0 x 1.6 x 0.5 mm	16.000~125.000 MHz	± 10 ~ ± 30	–	-40~+85°C -40~+125°C
Crystal	CXAN-161	1.6 x 1.2 x 0.4 mm	24.000~96.000 MHz	± 10 ~ ± 30	–	-40~+85°C -40~+125°C
Learn More About Crystals						
Oscillator	SMAN-321	3.2 x 2.5 x 1.2 mm	1~160 MHz	± 20 ~ ± 100	0.9, 1.2, 1.5, 1.8, 2.5, 3.3, 1.62~3.63, 5.0 V	-40~+85°C -40~+105°C -40~+125°C
Oscillator	SMAN-221	2.5 x 2.0 x 0.95 mm	2~160 MHz	± 20 ~ ± 100	0.9, 1.2, 1.5, 1.8, 2.5, 3.3, 1.62~3.63, 5.0 V	-40~+85°C -40~+105°C -40~+125°C
Oscillator	SMAN-211	2.0 x 1.6 x 0.8 mm	2~60 MHz	± 25 ~ ± 100	0.9, 1.2, 1.5, 1.8, 2.5, 3.3, 1.62~3.63 V	-40~+85°C -40~+105°C -40~+125°C
Oscillator	SMAN-161	1.6 x 1.2 x 0.7 mm	2~60 MHz	± 25 ~ ± 100	1.8, 2.5, 3.3, 1.62~3.63 V	-40~+85°C -40~+105°C -40~+125°C
Learn More About Oscillators						
TCXO	TXON-321A	3.2 x 2.5 x 1.2 mm	10~52 MHz	± 0.5 ~ ± 2.0	1.8, 2.5, 3.3, 1.68~3.63 V	-40~+85°C -40~+105°C
TCXO	TXON-221A	2.5 x 2.0 x 0.95 mm	10~52 MHz	± 0.5 ~ ± 2.0	1.8, 2.5, 3.3, 1.68~3.63 V	-40~+85°C -40~+105°C
TCXO	TXON-211A	2.0 x 1.6 x 0.8 mm	10~52 MHz	± 0.5 ~ ± 2.0	1.8, 2.5, 3.3, 1.68~3.63 V	-40~+85°C -40~+105°C
TCXO	TXON-161A	1.6 x 1.2 x 0.7 mm	10~52 MHz	± 0.5 ~ ± 2.0	1.8, 2.5, 3.3, 1.68~3.63 V	-30~+85°C -40~+85°C